Simplified Operating Instructions – T105-C / T108-C / T106-C / T17B-C

Timer Countdown Function

The Timer has a 100 hour countdown feature. i.e The timer can be set to any period from 1 minute to 100 hours and will countdown in the ON state and turn OFF at the end of the countdown period.

STEP 1

Press the 'Y' button.
Use the + or – button to select the 'DOWN' icon.
Then press Y to enter countdown mode.

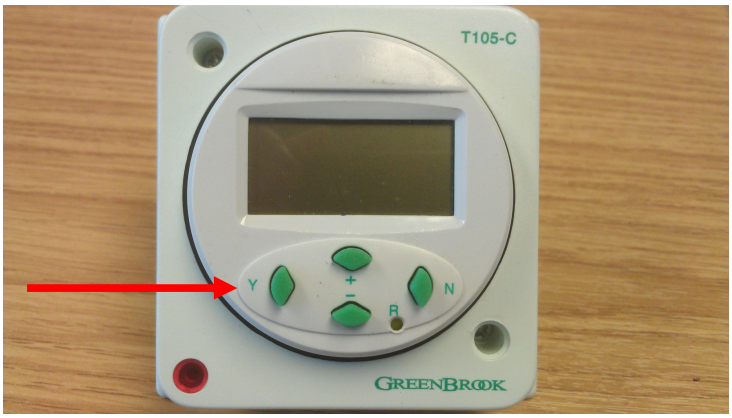

STEP 2

Use the + or – button to adjust hours. Press 'Y' to confirm. Minutes will flash.
Use the + or – button to adjust minutes. Press 'Y' to confirm.

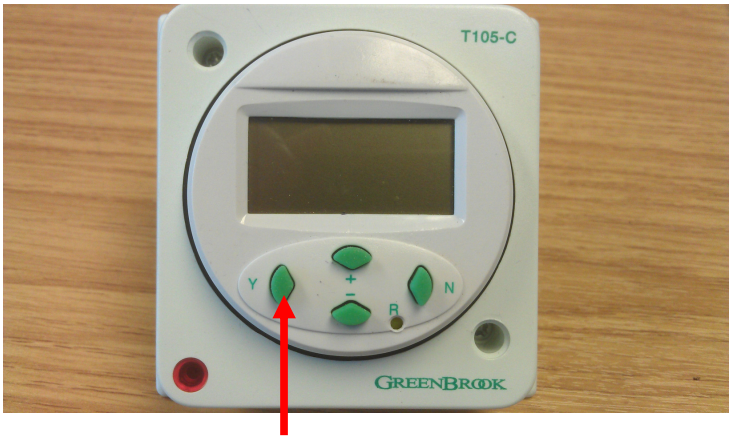

STEP 3

- Press the N button to start the countdown.

  (Output switched to ON during the countdown period)

- Press the N button to pause the countdown. (Output switched to OFF)

- To resume countdown simply press the N button.

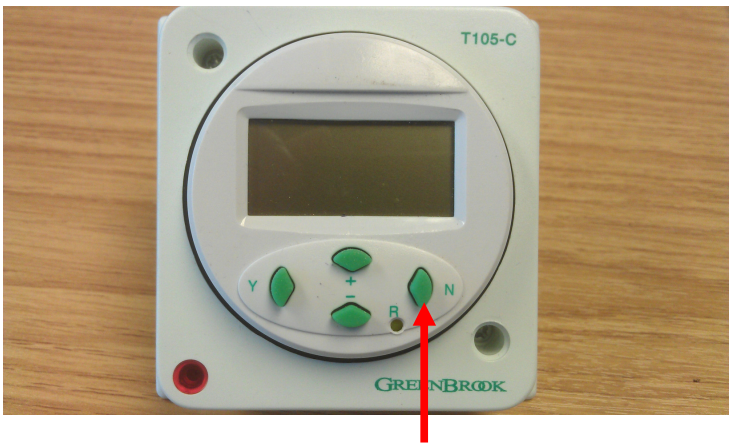

STEP 4

Press and hold the N button for more than 3 seconds to exit the countdown function.